

UPROLL


UNDER SCREED ACOUSTIC INSULATION




IMPACT NOISE ACOUSTIC INSULATION WITH HIGH ACOUSTIC PERFORMANCE AND MECHANICAL STABILITY, MADE IN ROLLS WITH SBR RUBBER GRANULES

TECHNICAL SPECIFICATION

9 mm acoustic insulation rolls, made of SBR (Stirene Butadiene Rubber) fibres and granules rubber, compacted using a latex binder in a hot process. A grey synthetic non woven anti-stretch backing is applied on one side. The dimensions of the roll are: 500 cm length, 104 cm width including 4 cm adhesive side border for rolls overlapping during installation. The total mass surface is 3,10 kg/m². Impact sound pressure level attenuation 24 dB, reaction to fire E, thermal conductivity coefficient 0,096 W/m K. Recycled content 90%.

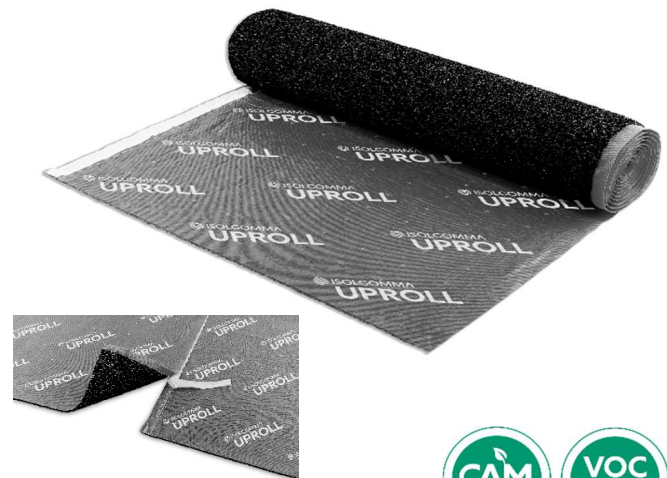

Self-adhesive side band for joining the mats

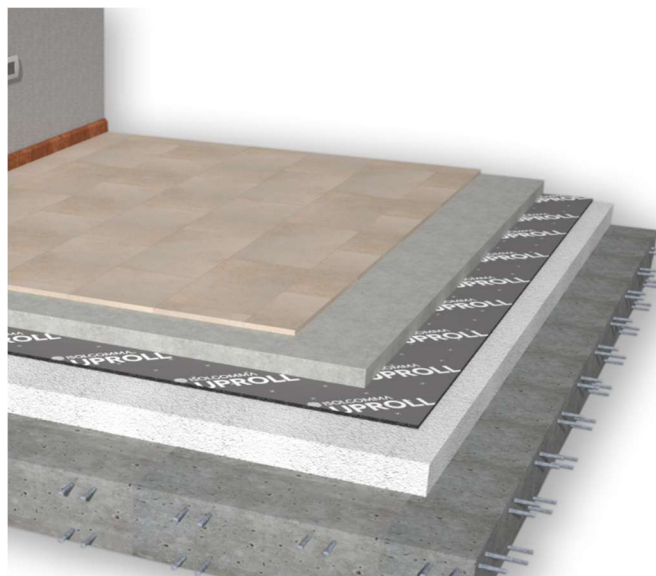

TECHNICAL DATA

Thickness	9 mm
Length	5,00 m
Width (including 4 cm overlapping band)	1,04 m
Mass per unit area	3,10 kg/m ²
Recycled content	90%

CERTIFIED ACOUSTIC IMPROVEMENT

Designed and created for the acoustic insulation of floors with floating or heated floor, even in a very low thickness

FLEXIBILITY

Designed to be used even in critical site situations, where limited spaces and contemporary interventions can be present

LAYING COSTS REDUCTION

Equipped with printed TNT to facilitate measuring and cutting activities. A special adhesive stick facilitates the junction between the mats

TO BE USED WITH

Under screed acoustic insulation for massive slabs where a high impact noise performance is required and low intervention thickness is present. Also suitable where radiant systems are present

Dynamic stiffness s'	11 MN/m ³
Compressibility c	1,7 mm
Impact sound pressure level attenuation ΔLw	24 dB
Reaction to fire	E
Thermal conductivity coefficient λ	0,096 W/m K



UPROLL

UNDER SCREED ACOUSTIC INSULATION



INSTALLATION INSTRUCTIONS FOR UPROLL

- 1** Apply the adhesive strip to the wall and floor with particular attention in the corners



- 2** Install the acoustic mat with rubber granules facing down



- 3** Joint two adjacent mats using the pre-built adhesive tape and following the dashed lines



- 4** Build the screed



- 5** Install the floor finishing (ceramic or wood)



- 6** Cut the exceeding part of the edging strip



ACOUSTIC CERTIFICATES
Product acoustic certificates are available and allow to comply with the limits imposed by law



INSTALLATION TEST
Acoustic performances of the intervention can be tested on site by a competent technician



ACOUSTIC REPORT
Our technical staff is able to give you the proper support in all the project phases, supporting you in the identification of materials



LAYING ASSISTANCE
Thanks to our extensive commercial technicians network, we are at your disposal for the coordination of the first laying phases on site

[SEE THE REFERENCES > VISIT THE WEBSITE](#)

[CONTACT THE TECHNICAL DEPARTMENT FOR MORE INFORMATION](#)



www.isolgomma.com
PRG-MOD. 15 - REV. 5.2 17/02/22 EN

© Isolgomma Srl. The data and images are indicative and can be changed at any time without notice

